

Hit & Miss Fencing Specification

1.8 or 1.2m Height

PCC Concrete Post & Gravel Board.

'D' Shaped Timber Top Rail.


150 x 25mm Vertical Timber Planks – offset to both sides.

75 x 50mm Timber Framing.

All timber to be Class 4 pressure treated sawn timber – UC4.

Timber to be free from large knots and defects.

63mm Hot Dipped Galvanised Ring Shank Nails.

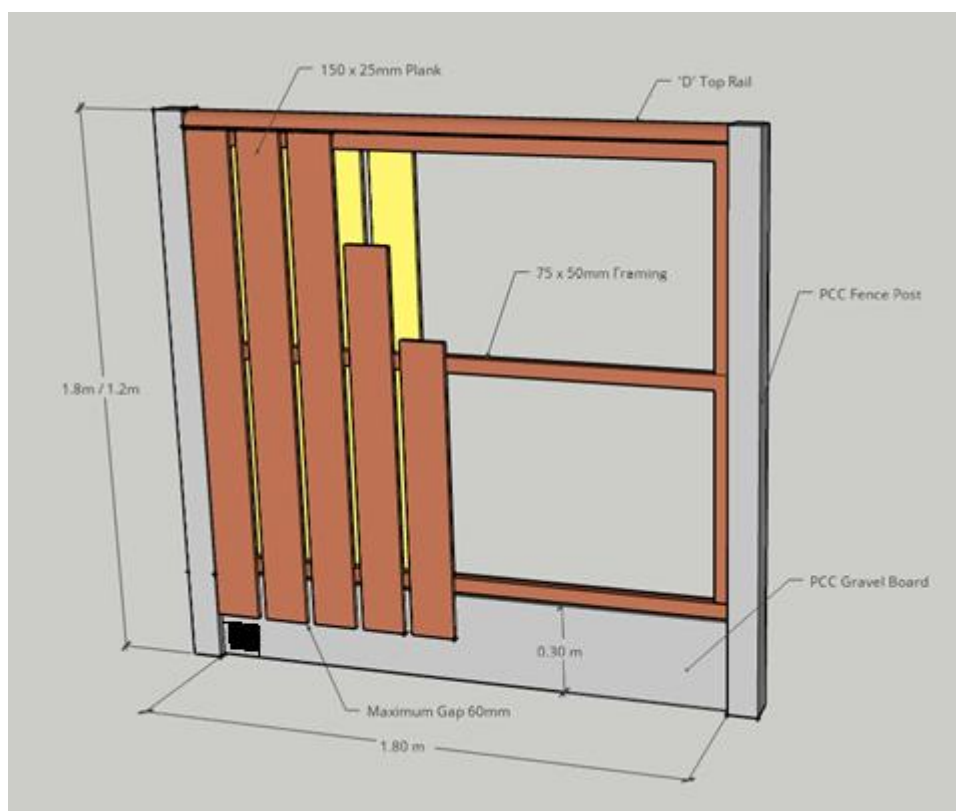

Hedgehog Highway.

A hedgehog hole is to be included at ground level at least once per side of the garden boundary. This is to come pre-installed in the gravel board, or to be cut onsite. A minimum size of 13cm x 13cm is required if this is to be cut onsite.




Gellir ateb yn Gymraeg neu Saesneg
You may reply in Welsh or English
0300 111 3030
post@barcud.cymru

Sylfeini cadarn | Firm foundations
Cartrefi gwell | Better homes
Cymunedau cryf | Strong communities

Hit & Miss Fencing Specification

1.8 or 1.2m Height

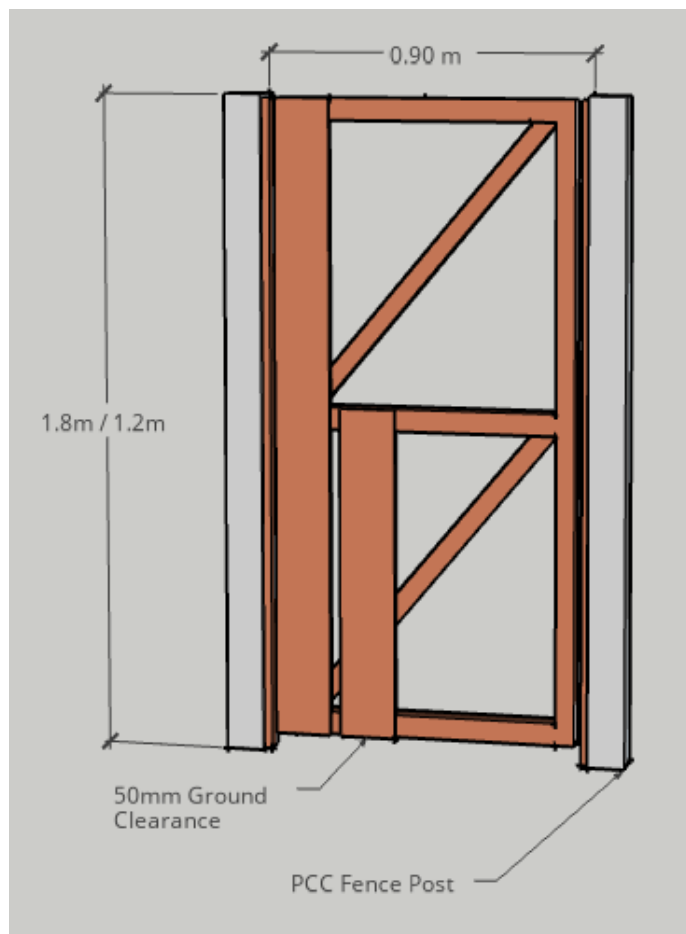

All Gates Single Side Hit & Miss

1.8m Gate:

3no. 450mm Hinges

1no. Padbolt Lockable

1no. Barrack Latch

1.2m Gate

2no. 450mm Hinges

1no. Auto Gate Catch

Heavy Pattern Auto Gate Catch. Galvanized	Barrack Latch Size: 225mm Galvanised	Weighty Scotch Tee Hinge. Size: 450mm. Galvanised.	½" Padbolt Lockable Galvanised
			



Gellir ateb yn Gymraeg neu Saesneg
You may reply in Welsh or English
0300 111 3030
post@barcud.cymru

Sylfeini cadarn | Firm foundations
Cartrefi gwell | Better homes
Cymunedau cryf | Strong communities