




21.5" LED MONITOR

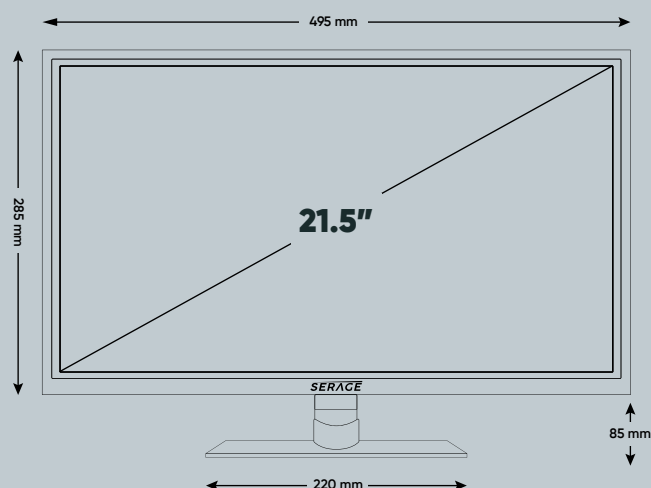

Model	SR215HDMI
Panel size	21.5 inch
Display area	478.66 (H) * 260.28 (V) mm
Backlight	E-LED
Resolution	1920*1080 (compatible 3840*2160/30HZ)
Pixel Pitch	0.0831(H)*0.241(V) mm
Display Ratio	16:9
Brightness	300cd/m ² (Central point, typical value)
Contrast	3000:1
Visual Angle	89/89/89/89 (Typ.)(CR≥10)
Response time	5ms(Gray To Gray)
Display color	16.7M
Surface Treatment (CF POL)	Anti-glare, Haze 25%
Control Mode	Panel
Inut Power	12V/3A
Input Interface	HDMI*1, VGA*1, USB*1 Audio output*1
Total Consumption	22W
Body Colour	Black
Material	Flame Retardant Plastic
Overall dimension	495*285*40mm (excluding foot height 85mm)
Packing Size	550*110*350mm
Mounting Method	Base, VESA (75mm*75mm)
Gross Weight/Net Weight	2.2kg/3kg
Outer Packing Size	560*580*370mm 5pcs/ctn
Outer Packing Weight	16kg
Environment Temperature	Suitable temperature 20°C
Enviroment Humidity	10%-90%RH

DC power supply, warranty card, manual, HDMI cable (complimentary), base

KEY FEATURES

21.5-inch LED Backlit Monitor

Case Type: Plastic

Maximum Resolution: 1920 (H) x 1080 (V)

Contrast Ratio: 1000:1

Brightness: 250 cd / m²

Aspect Ratio: 16:9

Packaging Dimensions: 520 x 419 x 96mm

Supports HDMI x1, DVI x1, VGA x 1

PRECAUTIONS

Handle with care when transporting and handling.

Do not apply in corrosive, flammable and explosive places.

To avoid the danger of electric shock, disconnect the power supply during installation, debugging and handling.

Do not install it near the heat source, so as not to damage the product due to high temperature.

Ensure all connections are properly and reliably connected.

Do not open the seal of the product without permission.