


AV/2 Containment - Loudspeaker wiring

Main Theatre

AV/SL Rack room Level 01

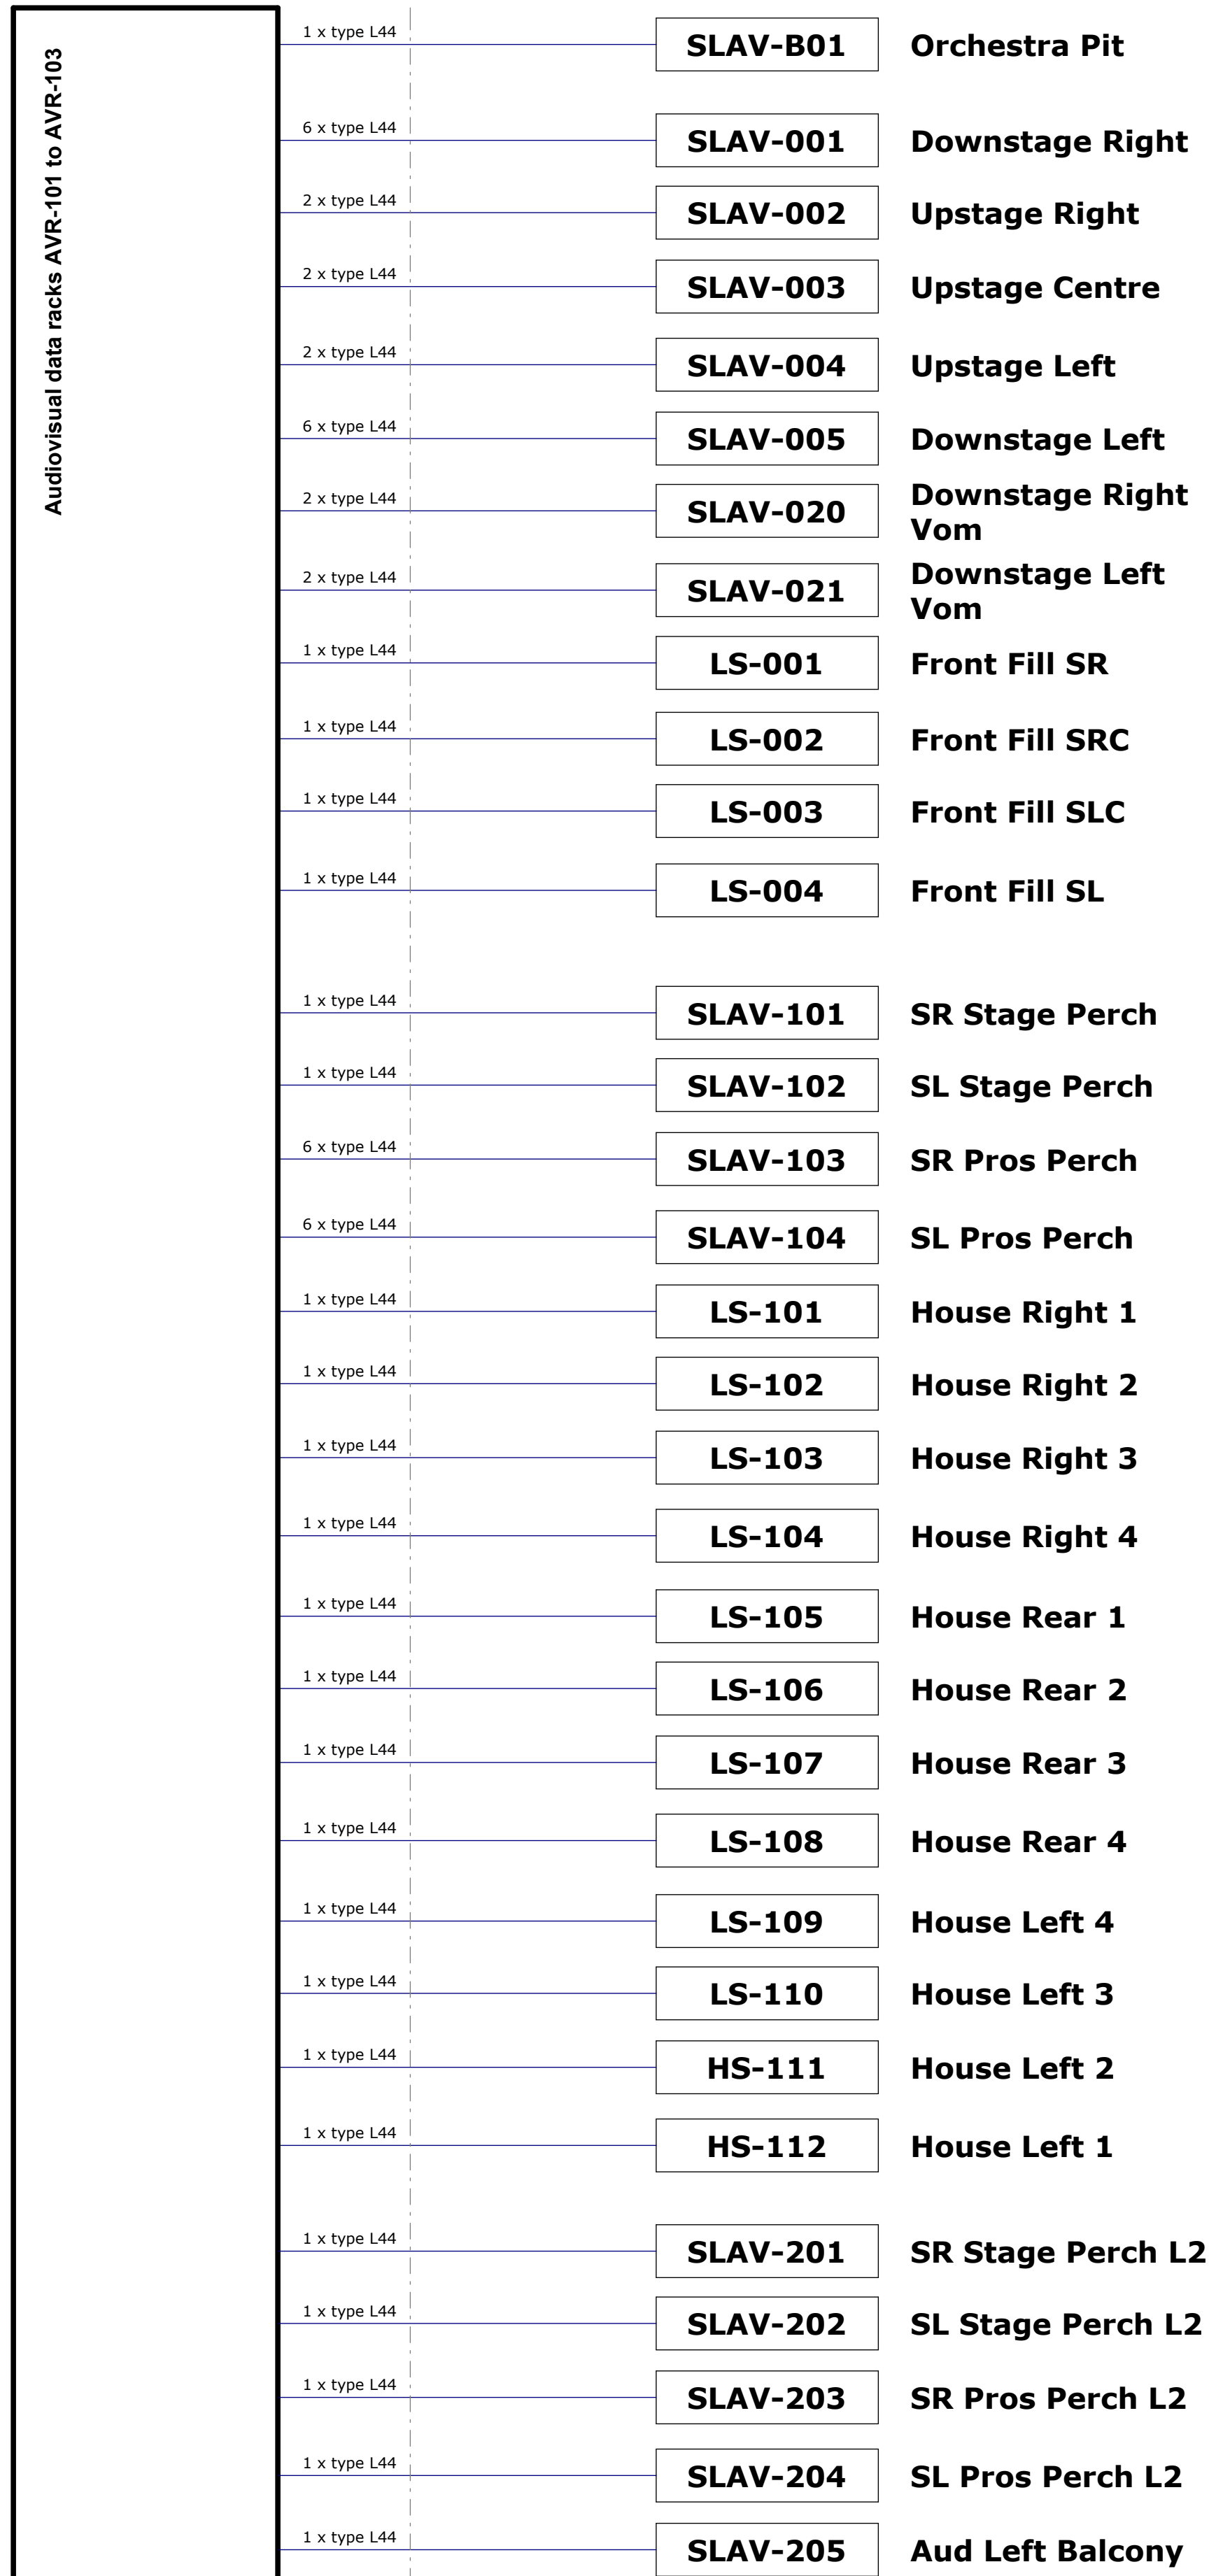

Continued on next column

Level L-01 - Basement


Level 0 - Ground Floor

Level 1 - First Floor

Level 2 - Second Floor

AV/SL Rack room Level 01

Continued from last column

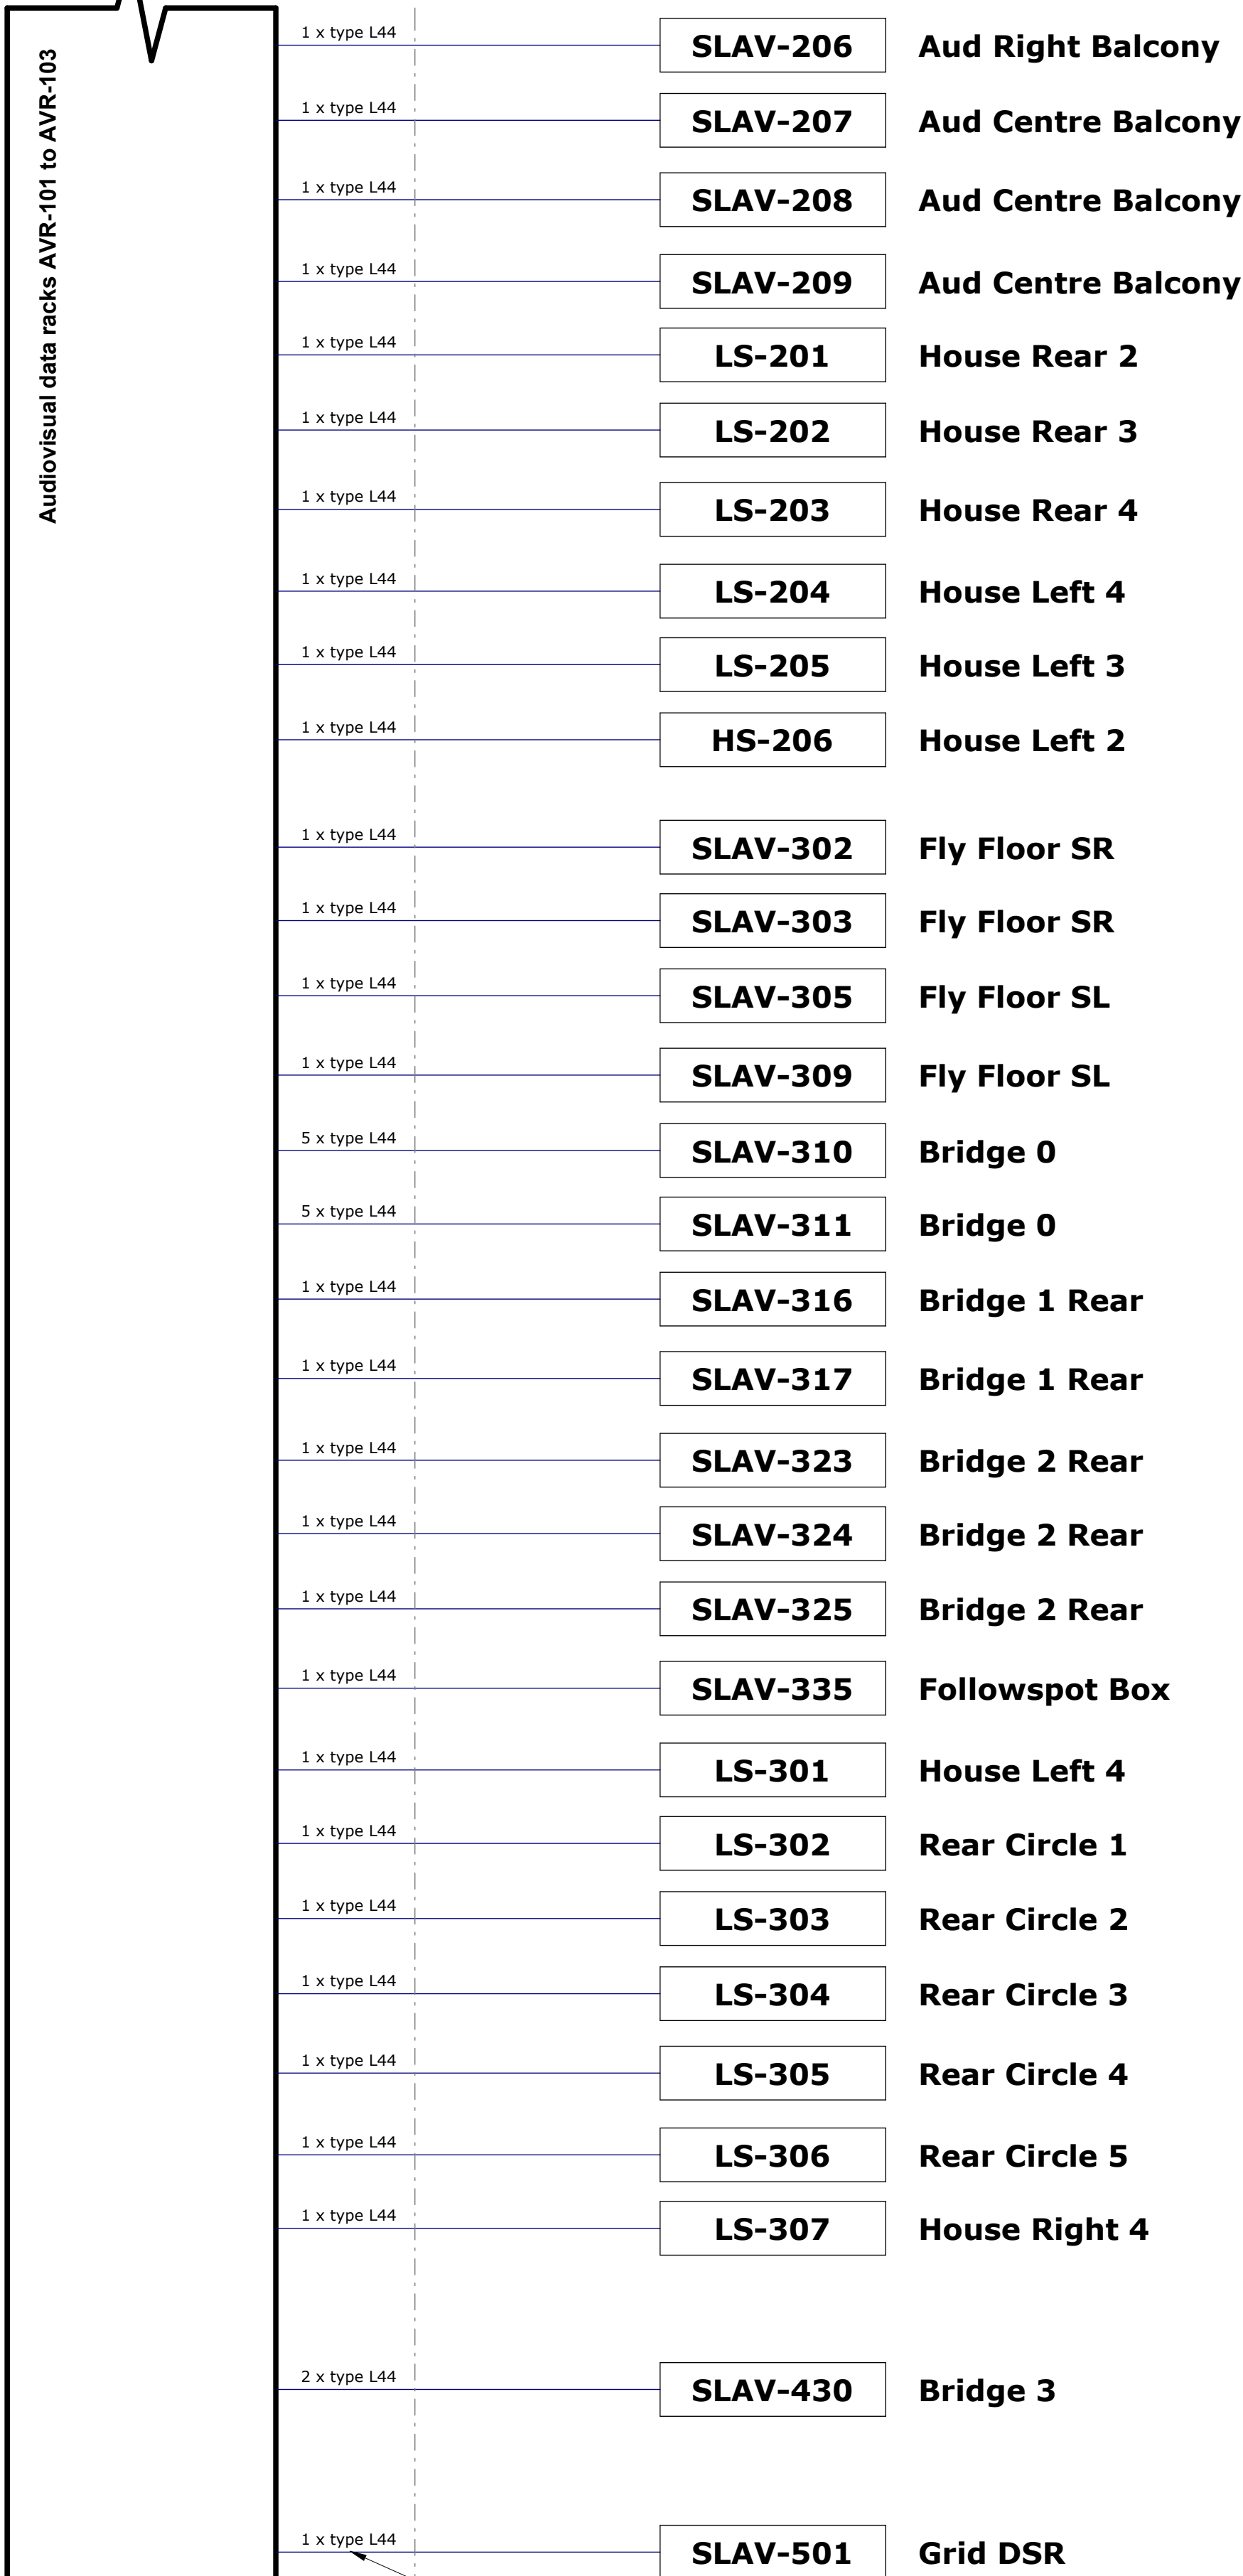

Cable codes here correspond to cable types in the Facilities Schedule. All cable sizes are to be specified by the specialist contractor.

Level 2 - Second Floor

Level 3 - Third Floor

Level 4 - Fourth Floor

Level 5 - Grid

Notes:-

This drawing should be printed in colour for clarity.

This series of drawings shows the loudspeaker cabling within the AV/2 containment group.

Note that boxes shown on this drawing may also contain AV/3 services and therefore will also appear on the schematic drawings for these containment groups.

This drawing is to be read in conjunction with the Facilities Planning Schedule (for cable specifications and circuit details within boxes) and General Arrangement drawings (for box locations).

Wiring, containment and back boxes are to be designed and installed by the Specialist Contractor.

All power cable sizes are to be specified by the Specialist Contractor.

AV/2 containment shown here is to be supplied, installed and terminated by the Specialist Contractor.

Key to Symbols

L44 - 4x 4mm Loudspeaker

A	TENDER	10/11/2025
Rev	Description	Date

Project title:
VENUE CYMRU, LLANDUDNO

Drawing Title:
AUDIOVISUAL SYSTEMS

SCHEMATIC WIRING DIAGRAMS -
CONTAINMENT GROUP AV/2 - LOUDSPEAKER
WIRING
MULTIPLE LEVELS

Drawing Type:
SCHEMATIC DRAWING



17 Short Street, London SE1 8LJ
T +44 (0)20 7928 0000
www.charcoalblue.com

Scale	Size	Status	
NTS	A1	Tender	
Drawn	Date	Checked	Date
SDE	20/10/25	JN	05/11/2025
DRAWING NUMBER			REV
LVC-CBL-SLAV-SC-005			A