


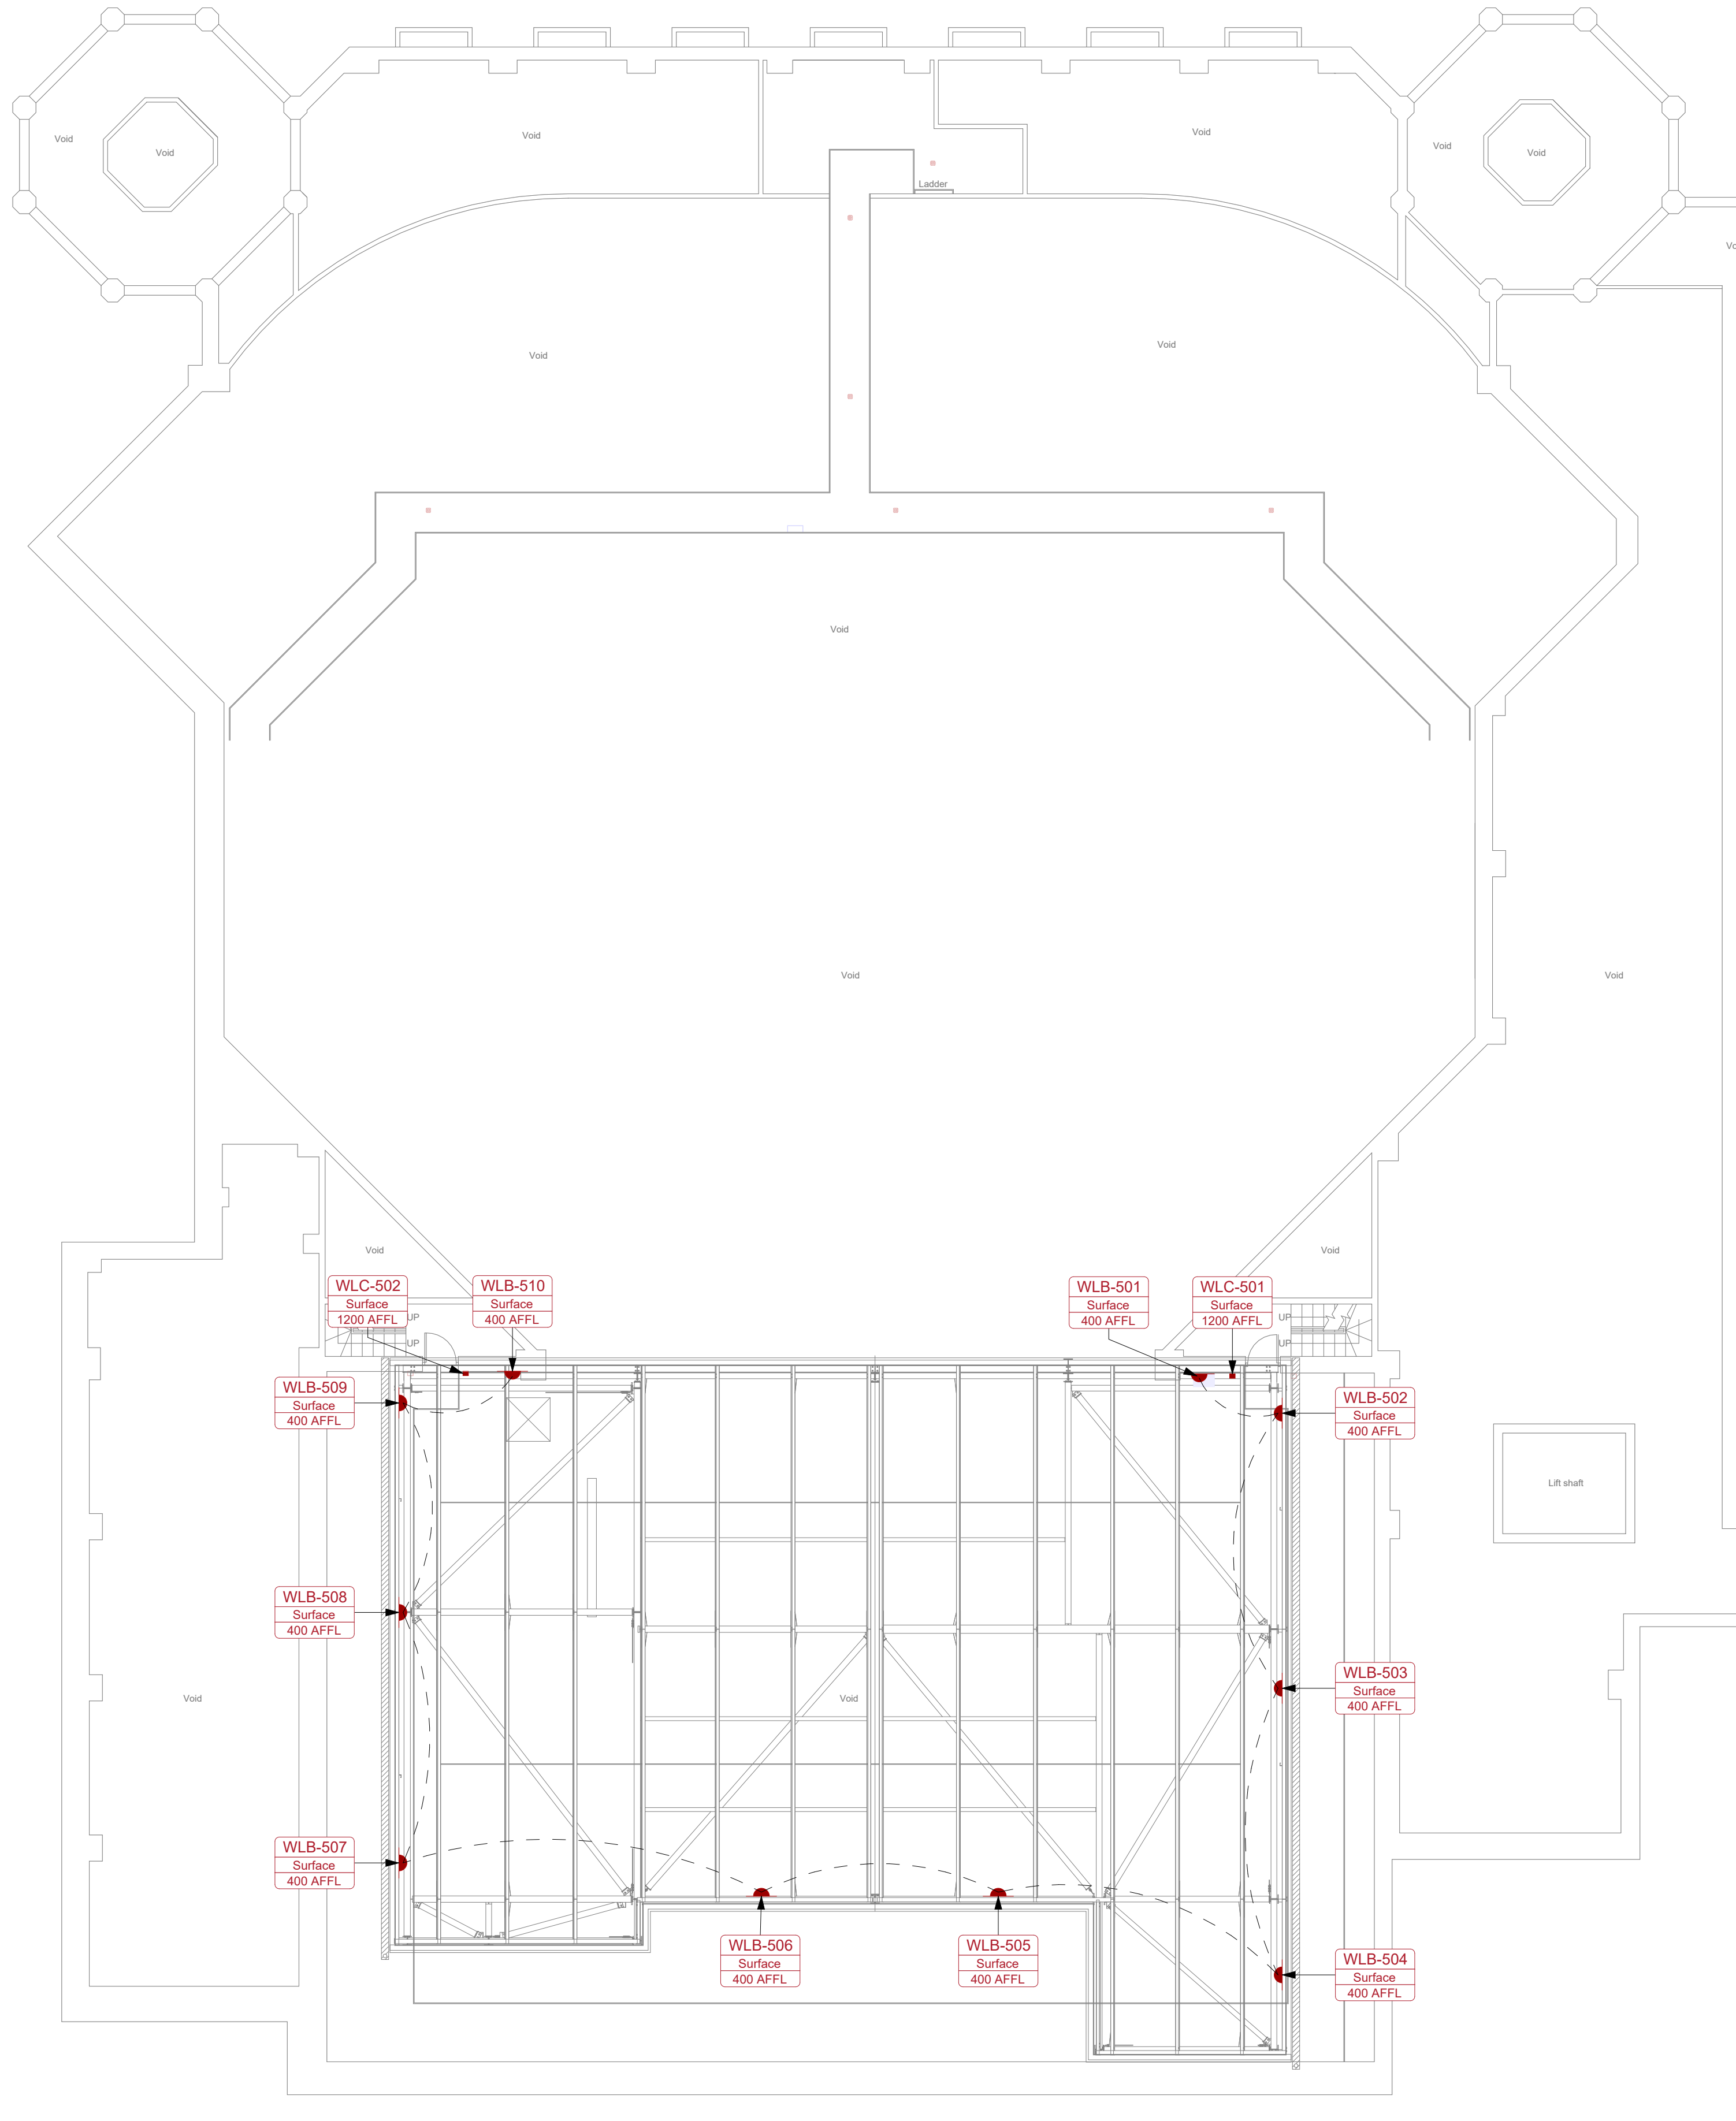

Notes:-

WLC - Worklight Control Push Button Station

WLM - Worklight Master LCD Screen Station

WLB - Blue Light Low with Cowl - Wall Mounted

CLB - Blue Light Dome with Cowl - Ceiling Mounted

FLD - LED White Flood - High Level Wall Mounted

TRC - Tracklighting with LED Spots - Ceiling Mounted

DMR - Local Worklight and Dimmer Switch pair for Track Lighting - Wall Mounted

SWI - Local Worklight Switch pair for LED Floods - Wall Mounted

Refer to general arrangement drawings for location of CBL lighting control panels and push-button panels.

This drawing is issued as guidance to the specialist contractor. All light fittings are to be detailed and provided as part of the specialist contractor's package. Refer to responsibility scope split for further details. Assets that are controlled by the worklight system will require all containment, data and load wiring to be supplied, installed and terminated by the Specialist Contractor.

A	TENDER	10/11/2025
Rev	Description	Date

Project title:

VENUE CYMRU, LLANDUDNO

Drawing Title:

WORKLIGHT SYSTEMS

LEVEL L05

GRID

Drawing Type:

GENERAL ARRANGEMENT

CHARCOALBLUE

THEATRICAL INNOVATION

ESTD 2004

17 Short Street, London SE1 8LJ
T +44 (0)20 7928 0000
www.charcoalblue.com

Scale	Size	Status	
1:100	A1	Tender	
Drawn	Date	Checked	Date
SDE	10/10/25	JN	05/11/2025
DRAWING NUMBER		REV	
LVC-CBL-WL-GA-013		A	