

PROJECT SPECIFICATION





BBA APPROVED – 03/4058 – PS3
WETHERBY EPSICON SYSTEM

Project Specification – PAS 2030:2023

Project Name: Cherry Grove, Gurnos

System: Wetherby Epsicon External Wall Insulation System

Substrate: Brickwork

Project Height: 2 Storeys.

Insulation: 100mm Stone Wool Insulation

System Finish: Wetherby Spar Dash Finish

Technical Sales Manager: Jonathan Gardner

Tel: 07872 007149

E-mail: jonathan.gardner@wall-systems.co.uk

Technical Support Manager: Dean Esposito

Tel: 07545 044669

E-mail: dean.esposito@wall-systems.co.uk

PROJECT SPECIFICATION

Project Ref: JG_26-03528LR1

Project Name: Cherry Grove, Gurnos

11 February 2026

Prepared By: RT

Checked By: BA

Page 3 of 24

Address List

0072618	1	Cherry Grove	CF47 9SW	Gurnos Estate
0072627	3	Cherry Grove	CF47 9SW	Gurnos Estate
0072636	5	Cherry Grove	CF47 9SW	Gurnos Estate
0072645	7	Cherry Grove	CF47 9SW	Gurnos Estate
0072672	13	Cherry Grove	CF47 9SW	Gurnos Estate
0072681	15	Cherry Grove	CF47 9SW	Gurnos Estate
0072690	17	Cherry Grove	CF47 9SW	Gurnos Estate
0072716	21	Cherry Grove	CF47 9SW	Gurnos Estate
0072725	23	Cherry Grove	CF47 9SW	Gurnos Estate
0072734	25	Cherry Grove	CF47 9SW	Gurnos Estate
0072743	27	Cherry Grove	CF47 9SW	Gurnos Estate
0072752	29	Cherry Grove	CF47 9SW	Gurnos Estate
0072770	33	Cherry Grove	CF47 9SW	Gurnos Estate
0072799	37	Cherry Grove	CF47 9SW	Gurnos Estate
0072805	39	Cherry Grove	CF47 9SW	Gurnos Estate
0072814	41	Cherry Grove	CF47 9SW	Gurnos Estate
0072823	43	Cherry Grove	CF47 9SW	Gurnos Estate
0072832	45	Cherry Grove	CF47 9SW	Gurnos Estate
0072903	4	Cherry Grove	CF47 9SW	Gurnos Estate
0072912	6	Cherry Grove	CF47 9SW	Gurnos Estate
0072921	8	Cherry Grove	CF47 9SW	Gurnos Estate
0072930	10	Cherry Grove	CF47 9SW	Gurnos Estate
0072940	12	Cherry Grove	CF47 9SW	Gurnos Estate
0072959	14	Cherry Grove	CF47 9SW	Gurnos Estate
0072968	16	Cherry Grove	CF47 9SW	Gurnos Estate
0072977	18	Cherry Grove	CF47 9SW	Gurnos Estate
0072986	20	Cherry Grove	CF47 9SW	Gurnos Estate
0073016	26	Cherry Grove	CF47 9SW	Gurnos Estate
0073025	28	Cherry Grove	CF47 9SW	Gurnos Estate
0073034	30	Cherry Grove	CF47 9SW	Gurnos Estate
0073052	34	Cherry Grove	CF47 9SW	Gurnos Estate
0073061	36	Cherry Grove	CF47 9SW	Gurnos Estate
0073080	40	Cherry Grove	CF47 9SW	Gurnos Estate
0073099	42	Cherry Grove	CF47 9SW	Gurnos Estate
0073105	44	Cherry Grove	CF47 9SW	Gurnos Estate
0073114	46	Cherry Grove	CF47 9SW	Gurnos Estate
0073132	50	Cherry Grove	CF47 9SW	Gurnos Estate

PROJECT SPECIFICATION

Project Ref: JG_26-03528LR1

Project Name: Cherry Grove, Gurnos

11 February 2026

Prepared By: RT

Checked By: BA

Page 4 of 24

0073141	52	Cherry Grove	CF47 9SW	Gurnos Estate
0073150	54	Cherry Grove	CF47 9SW	Gurnos Estate
0073160	56	Cherry Grove	CF47 9SW	Gurnos Estate

WETHERBY WALL SYSTEMS

Wetherby Walls Systems are the UK's market leading EWI system supplier, providing quality products and systems and unrivalled technical and on-site project support. We aim to provide environmentally responsible and sustainable building products of the highest quality, continually improving on our quality and system accreditations to ensure that optimum standards are met.



WETHERBY PREMIUM CERTIFIED PRODUCTS

Wetherby Walls Systems products and EWI systems are tested to the highest level with an unrivalled range of BBA, BDA and ETA certificates available for use on projects in the UK. All testing achieves the highest European standards, ensuring long term durability, strength and premium performance. BBA/BDA approved systems provide a minimum life expectancy of 30 years. BRE Fire Certification has also been achieved for a large number of systems, with certain certification extending to 60-year life expectancy.



UK MANUFACTURING

Here at Wetherby, we take our responsibility to 'Buy British' extremely seriously. All of our current and potential suppliers undergo a rigorous annual assessment. Each supplier is reviewed over a number of areas including responsible procurement, product suitability, commitment to sustainability, quality etc. Only when we are completely satisfied are they included on our Supply Chain Database.



ISO 9001, ISO 14001, & ISO 45001

Wetherby Wall Systems have a strong pro-active approach to internal Quality Systems, Environmental Management Systems and Health and Safety. Our ISO Integrated System is regularly audited internally by qualified auditors and annually by independent external auditors, Alcumus ISOQAR. This ensures consistency in the supply and quality of our materials and services, and our environmental responsibilities and targets which we take very seriously. This includes our ongoing commitment to recycle, re-use, reduce GHG's and improve products and systems alongside our partners and suppliers. The main aim is to maximise sustainability for all products and systems across our extensive range. We have a strong pro-active approach to Health and Safety. We manage all risks associated with our activities by regularly monitoring our premises, revising Risk assessments, Safe Systems of work, and Method Statements when required. We strive to provide the best training, support, and management on all our projects providing knowledge and experience throughout the task being undertaken.



Certificate Number 16512
ISO 9001
ISO 14001
ISO 45001

PROJECT SPECIFICATION

Project Ref: JG_26-03528LR1

Project Name: Cherry Grove, Gurnos

11 February 2026

Prepared By: RT

Checked By: BA

Page 6 of 24

TECHNICAL SERVICES

Wetherby offer a wide range of technical services to support project design and system installation. In depth NBS Specifications, project specific CAD drawings, photographic overlays, U-values and condensation / humidity risk analysis documents are all readily available via our Technical Support Team. For **Technical Enquires** please contact on **0800 1073299** or technical@wall-systems.co.uk

nbsPlus**AUTODESK®**
AUTOCAD® 2020**TRAINING SERVICES AND TRAINED APPLICATORS**

We provide a variety of in-depth training courses, covering all systems, to ensure that installations are completed to the highest possible standards.

For training enquires please contact: 01942 529336.

For information on our Trained Applicators please contact your Area Sales Manager as per details on page 2 of this specification.

**SITE SUPPORT, PULL OUT TESTS AND INSPECTIONS**

Wetherby Wall Systems offer unrivalled site support for EWI projects with 8 Site Supervisors strategically positioned across the UK. Pull out testing, product information, detailing advice and application assistance are all available from our experienced team.

**SAMPLE SERVICE**

We provide a FREE sample service for all of our products and systems.

To access this service, contact our sample department on 0800 1073288 or alternatively e-mail Angela Naylor who will be more than happy to assist you with your enquiry: angela.naylor@wall-systems.co.uk

**GUARANTEES**

Wetherby can provide a guarantee covering defects in materials on Wetherby BBA / BDA / ETA approved EWI systems installed by Wetherby recognised contractors, for the first 10 years of the system lifespan*. Extended guarantees are available for government backed schemes provided by carefully selected third party insurance partners such as SWIGA and GDGC*. Please contact Wetherby for further information.
(*conditions apply)

**CDM REGULATIONS 2015**

Wetherby Wall Systems provide technical support as a supplier of façade systems and we hold the position of 'designers' according to the CDM Regulations 2015. Wetherby have a number of legal responsibilities in this role when preparing or modifying designs, to eliminate, reduce or control foreseeable risks that may arise during construction, maintenance and use of a building once built. We are also obligated to provide timely information to other members of the project team to help them fulfil their duties.

Further information is contained in our CDM document (WF224) which is applicable to all designs and is available on our web site (www.wall-systems.co.uk/xpagemx) or on request



PAS2035:2023

The PAS2035 design process must be followed as per the PAS document "PAS 2035:2023 Retrofitting dwellings for improved energy efficiency – Specification and guidance".

It is essential the correct surveys are completed, risk assessments are carried out and the roles and responsibilities are agreed, including a Retrofit Coordinator, taking responsibility for the specific property design.

This specification must be agreed and signed off by the project specific Retrofit Coordinator, as the PAS2035 provides a whole-house approach.

PAS 2030:2023 REQUIREMENTS

PAS 2030:2023 PRE-INSTALLATION BUILDING INSPECTION REQUIREMENTS

- Pre-installation Building Inspection Requirements
 1. To meet the requirements specified in PAS 2030:2023, the designated competent person shall confirm that:
 - a) A full and detailed pre-design building survey has been undertaken by a competent person (see B4-I3 of the PAS), prior to the retrofit design being undertaken; and
 - b) The retrofit design relevant to the installation under inspection has been produced in accordance with PAS 2030:2023, taking full account of the findings and recommendations of the pre-design building assessment, including:
 - thermal performance calculations
 - moisture risk analysis
 - ventilation requirements and standard / bespoke drawing details
 - the main components of the system including the fixing type / method, the insulation type and thickness, the joint details and specifications, the reinforcing coat and type of reinforcement and the finish;
 - the proposed details for the main interfaces; (thermal bridging, meter boxes, reveals, roofline joists, party walls, base detail with particular reference to below dpc, base/floor details, seals at windows/doors, seals to penetrations, light fittings, sockets, fixing and sealing of surface mounted structures, interfaces with ceilings, interfaces with roof, junctions between the system and other finishes and/or other EEM) clearly demonstrate how the installation will avoid condensation risk particularly at moisture sensitive locations such as embedded timbers (e.g. timber joist ends) as well as surface condensation; and
 - the installation to the retrofit design is practical and achievable given the particular EWI system chosen for the project and the specific dwelling construction, site conditions and other EEMs planned for the property. (See also the Measures Interaction matrix Figure A.1).

2. As a minimum the Retrofit Installer shall:
- investigate and assess if the EWI installation work:
 - results in non-compliance with the Building Regulations, e.g. in relation to workmanship, materials, structural stability, fire safety;
 - provides resilience to moisture. Where possible, any areas of non-compliance shall be rectified by selection of another solution/ detail, which shall be documented in the pre-installation building inspection and all contract documentation amended accordingly i.e. specification, drawings, method statement;
 - results in avoidable thermal bridging; where thermal bridging is avoidable by adaptation of the detail, such measures shall be taken and the contract documents amended to suit. Design details shall be such that they incorporate additional capacity, that for example, will provide water management within the system should surface or interstitial condensation occur;
 - results in unsafe operation of combustion appliances; unless an alternative safe detail can be found, EWI works shall not progress in the area causing the unsafe operation;
 - compromises the functionality of existing ventilation ducts/systems; unless an alternative safe detail can be found, EWI works shall not progress in the area causing the unsafe operation;
 - compromises the functionality and/or safety of existing services (gas, electric, water, telephone, etc.); unless an alternative safe detail can be found, EWI works shall not progress in the area causing the unsafe operation; and
 - results in the proposed installation being non-compliant with any requirements of the EEM supplier or of the retrofit design.
 - include confirmation that the condition of the substrate is suitable for the works to commence and where all or any of the substrate does not fulfil the requirements for installation, preparation of proposals for adaptations to be made or additional preparation undertaken that will be necessary in order that works can commence.
 - verify that all instances of potential non-compliance identified in the pre-installation building inspection shall be documented and referred to the Retrofit Coordinator for resolution. Any design adjustments, special adaptations and/or additional preparation requirements shall be confirmed as acceptable in writing, by the system supplier and/or the Retrofit Coordinator.
 - amend the retrofit design documentation to include any specified changes to the installation, the installation method statement modified accordingly and the pre-installation building inspection records updated to provide documentary evidence that the intended modified installation will address all the issues identified in the pre-installation building inspection and meets the requirements of all parties.

NOTE: In undertaking pre-installation building inspections it is recommended that Retrofit Installers use an industry recommended checklist (see PAS 2030:2023 clause 10.7.1).

3. The Retrofit Installer shall
- verify that the pre-installation building inspection has been independently checked by an appropriately qualified person (see PAS 2030:2023 clause B4-I3) prior to commencement of installation;
 - a randomly selected 1 in 10 of those checks (minimum 1) shall include physical inspection of the dwelling by a qualified person;
 - the person undertaking the independent checks and inspection shall:
 - be independent of the inspector or the Retrofit Installer of the EWI; and
 - not be paid by results nor remunerated only where an assessment is found to be valid;
- OR
- verify that a recognised pre-notification process has been undertaken under an industry quality assurance scheme for external wall insulation, that has the features listed in B.1 of PAS 2035:2023.
4. The Retrofit Installer shall confirm that each inspection checked includes a unique identifier and the names of the persons who completed the inspection and the check.

PAS 2030:2023 ADDITIONAL INSTALLATION REQUIREMENTS

Due to the high risk of thermal by-pass rendering the insulation ineffective, external wall insulation shall not be installed on walls of cavity construction that have unfilled cavities or have had cavity wall insulation removed and not replaced, unless the cavities have been sealed in accordance with the specifications and construction details provided by the Retrofit Designer (see PAS 2035:2023 for further details).

The Retrofit Installer shall use methods of installation specified by the system supplier (where provided) and in accordance with the relevant retrofit design. This information shall be included in the installation method statement. In undertaking the installation, the Retrofit Installer's responsibilities shall include:

- a) Before installation starts, confirming that the retrofit design has made provision for:
- the EWI system provided for installation is that recommended by the pre-design building survey and specified by the retrofit design;
 - wind loads have been calculated and taken into account in the fixing requirements;
 - all essential ventilation openings that require sleeving or safeguarding before installation are located and identified;
 - the position of all flues whether or not they are in service is determined and the measures that shall be taken to safeguard their proper functioning is determined;
 - any existing cables, pipework, ducting etc. that require it are removed or repositioned as/where necessary to accommodate the planned EWI system, with authorization from the relevant responsible body (where required) and undertaken by a person competent to undertake such work; the existing ground levels, paths or decking adjacent to the dwelling are 150 mm below the level of the damp proof course; and
 - other areas of the dwelling and surrounding area that could be at risk during installation are adequately protected to ensure they are not damaged; and in the event that any of these aspects is not adequately covered, liaising with the Retrofit Designer to provide for their undertaking.

b) During installation, verifying that:

- all work is carried out in accordance with the site-specific retrofit design, drawings and method statement and that work is not permitted to progress unless copies of the site-specific specification documentation are accessible at location and all operatives are aware of the content and requirements relevant to their designated activities;
 - the system and all detailed interfaces with other parts of the dwelling or other planned EEMs to be undertaken in a manner and sequenced such, that all measures are fully effective, with optimized performance and junctions that are safe, durable and fully weatherproof for all expected exposure conditions. e.g. interface between EWI system and planned replacement windows; and
 - whether or not specifically required by the retrofit design, the items listed in i) to viii) below are given particular attention with regard to the efficacy and durability of the detail especially concerning the management and exclusion of moisture and/or the risk of surface/interstitial condensation or rising damp. Mastic sealants shall always be supported by a primary seal below, and all details shall be fully weatherproof:
 - i. system base detail (including below dpc);
 - ii. interfaces with roofs at eaves and verges (where metal or plastic cappings and trims shall not be used); unless these are detailed within the document External Wall Insulation Specification for Weathering and Thermal Bridge Control [N2] (PAS 2030:2023 clause 10.7.1);
 - iii. window/door reveals/heads;
 - iv. system/cill interfaces (incl. overhang requirements/weepholes/thermal movement);
 - v. surface fixtures (structurally sound);
 - vi. penetrations through the system;
 - vii. interfaces with roof soffits, flat roofs, conservatory roofs etc.; and
 - viii. detailing and sealing around vents/flues, meters and other heating related structures/pipework.
- PLEASE REFER TO WETHERBY DETAIL DRAWINGS FOR GUIDANCE

- all weather seals at the interface between EWI systems and other structures/finishes are installed with particular attention given to the soundness/cleanliness of contact surfaces, continuity and effectiveness around corners, bond to surfaces and the durability of the water seal;
- all details are installed to minimize the risks of thermal bridging, removing/relocating/extending to allow continuity of insulation in all cases e.g. rooflines, meter boxes, pipework, flues, ducts;
- photographic evidence of key stages of the installation is prepared and retained for the period of the guarantee, including close up photographs of representative examples of all moisture and thermally sensitive details; installations are undertaken in accordance with the specification for the installation of external wall insulation ensuring the safety and operation of fuel burning appliances, taking account of the recommendations provided in the document External Wall Insulation Specification for Weathering and Thermal Bridge Control [N2] (see PAS 2030:2023 clause 10.7.1);
- ventilation of the dwelling is assessed and if necessary upgraded in accordance with the retrofit design and with the requirements of PAS 2035:2023; and
- upon completion of the installation or at the end of each working day, if the installation takes longer than one day, the operatives investigate and confirm the proper functioning of all ventilation openings and flues.

NOTE 1 Attention is drawn to the requirements for installation methods to be included under current certification issued by a product certification body, with respect to the product/system to be installed, against UK requirements and regulation and the Retrofit Installer should be aware that training from the supplier or training acceptable to the supplier is necessary before an application for assessment/certification is made to a certification body.

NOTE 2 Attention is drawn to the need, where relevant, for all external wall insulation installation work to comply with the current Building Regulations that apply in the UK country in which the installation is being carried out. In particular, the need for compliance in relation to the following aspects is highlighted: fire safety; resistance to moisture; ventilation; and conservation of fuel and power. Further guidance on the requirements of the Building Regulations in England is provided in Approved Documents A-S [6] and Regulation 7: Workmanship and Materials [7]. Further guidance on the requirements of the Building Regulations in Wales is provided in Approved Documents A-R [8] and guidance on Regulation 7: Workmanship and Materials [7]. Further guidance on the requirements of the Building Regulations in Scotland is provided in the Domestic Technical Handbook [9] and Non-Domestic Technical Handbook [10].

PAS 2030:2023 RETROFIT INSTALLER COMPETENCE RATIO

For each installation task to be undertaken, the Retrofit Installer shall employ or subcontract at the particular location, at least one vocationally competent operative. For each installation, the vocational competence ratio (see PAS 2030:2023 3.29) shall be determined by the Retrofit Installer in relation to the:

- a) range, scale, geographical spread and complexity of the work being undertaken; and
- b) supervision and experience of the individual that meets the vocational competence requirements for the relevant tasks and the relative experience of the operatives being supervised;

but shall not be less than one carded operative per team of 4 (1 to 3), at the specified installation location at any time.

NOTE 1 Where a vocationally competent operative is newly qualified, it may be appropriate for a lower competency ratio to be applied.

For each installation task to be undertaken at a particular location, supervision, inspection and confirmation of compliance of all work undertaken in respect of that task at that location shall be undertaken by a vocationally competent operative appointed by the Retrofit Installer to do so.

NOTE 2 It is recommended that vocationally competent operatives carry a document supporting the nature, currency and source of that competency, for production upon request.

PAS 2030:2023 MEASURE SPECIFIC INFORMATION TO BE HANDED OVER TO THE CLIENT

- The user manual shall include details on fixing to the system, drilling or cutting the system, repairs to damaged areas, avoiding damage (e.g. ladders), cleaning recommendations, importance of weather seals, name/contact details of both the Installer and system certificate holder, materials specification (name, colours, etc.) and guidance on living in a highly insulated property, including the need for appropriate ventilation. The contents of the manual shall be explained to the client (not just left with them).
- Where end-user maintenance is possible, details of how to undertake the maintenance including frequency and any product or tools that shall be used and where to obtain the required products and tools.
- Building Regulations compliance certificate (or information explaining that a Building Regulations compliance certificate is required and will be provided within 30 days).
- It shall be explained to the client that repairs should be carried out by a competent person, but that maintenance is their responsibility.
- Any relevant product warranty information and guarantees shall be included in handover.

WETHERBY PAS2030:2023 EPSICON SPECIFICATION**M21****Insulation with rendered finish**

To be read with Preliminaries/General Conditions.

This specification is valid for 6 months from issue date, due to the changing industry regulations and requirements.

For an updated version of the specification please contact the relevant technical sales manager.

This specification is specifically for the named project and is not transferable to other projects, projects require specific custom specifications, please contact Wetherby Technical departments for further information.

GENERAL / SYSTEM REQUIREMENTS**120 SURVEY OF EXISTING WALLS**

- Timing: Before starting work covered in this section.
- Objective: To confirm suitability for application of external wall insulation system.
- Survey report: Submit, covering all relevant matters listed below:
 - The form and condition of the structural substrate.
 - A schedule of repairs and / or additional works necessary to render the substrate suitable to receive the system.
 - A schedule of services, fixtures and fittings requiring removal to facilitate installation of the system.
 - Proposals for treatment of potential cold bridges e.g. reveals, concrete floor edges.
 - Remove existing rainwater pipes and re-direct away from work surface whilst work proceeds. Ensure all rainwater from the roof area is carried away from the work area by means of temporary fixed rainwater goods.
 - Remove, extend beyond the surface of the proposed system and securely re-fix, to the satisfaction of the supervising officer, soil stacks, waste water pipes, overflows, vent pipes etc.
 - Any other information considered relevant.

150 WIND LOADING

- When installed on suitable walls, the system can adequately transfer to the wall the self-weight and negative (suction) and positive (pressure) wind loads normally experienced in the United Kingdom.
- Wetherby or the fixing manufacturer will undertake fixing pull out tests on site to verify the adequacy of the fixings.
- Wetherby will provide information on the system dead load weights on request to allow an independent check to be made of the substrates adequate strength and suitability.
- On projects where higher wind load coefficients are expected, wind load calculations are required in order to establish the minimum number of fixings required per m² to resist the maximum wind loads acting on the building. In order to do this, wind loads must be calculated by a suitably qualified and experienced structural engineer in accordance with BS EN 1991-1-4:2005 and provided to Wetherby. Wetherby will then confirm an adequate fixing pattern for the project.

160 REMEDIAL WORK

- Remedial work shown to be necessary by survey: Employer's responsibility.

180 STRUCTURAL SUBSTRATE

- Description: Brickwork.
- Preparation:
 - Treatment to Existing Sound Surfaces
Remove any existing loose material and where required dub out the surface level, ready to receive the EWI system. The existing walls are to be cleaned with a wire brush or pressure jet wash, to the satisfaction of the Contract Administrator, to remove any friable material, algae or lichen, and to provide a good key for Wetherby products. Treat areas of moss, algae and mould growth with Wetherby Biocidal Wash. Dense smooth surfaces may require treating with Wetherby Stabilising Solution / Bonding Agent to ensure adequate adhesion on wet fix or render only applications.
 - If the walls include existing render or the substrate isn't line and level and requires dubbing out, the fixing lengths stated within this specification may need to change. This will need to be confirmed on site prior to the installation of the Wetherby system. Sizing of flashings, trims and beads may also require alterations.
 - Dubbing Out
Where necessary dub out, using Wetherby Insulation Bedding Adhesive, any hollow / defective areas to leave a suitable surface for the application of the insulation boards. Maximum dubbing coat thickness: 16mm.
 - Biocidal Wash
Where required, apply one coat of Wetherby Biocidal Wash to the entire surface by roller or knapsack spray and allow to dry. Brush the surface to remove all signs of growth before rendering commences.
 - Stabilising Solution
Where required, apply one coat of Wetherby Stabilising Solution to the entire surface by roller, ensuring uniform coverage and allow to dry.

210B EXTERNAL WALL INSULATION SYSTEM

- **Manufacturer:**
Wetherby Wall Systems Ltd.
1 Kid Glove Road
Golborne Enterprise Park
Golborne
Greater Manchester
WA3 3GS
Tel: 01942 717100
Fax: 01942 717101
Email: info@wall-systems.co.uk
Web: www.wall-systems.co.uk
- System Reference: **Wetherby Epsicon External Wall Insulation System.**



- Insulation: Wetherby Stone Wool Insulation Boards.
 - Thickness: 100mm.
 - Board Size: 1200 x 600mm.
 - Minimum Compressive Strength: 10 kPa.
 - Thermal Conductivity: 0.036 Wm²/K.
 - Performance in Relation to Fire:
 - Class A1 (BS EN 13501-1:2002).
 - Non-combustible.
 - Environmental:
 - CFC / HCFC Free.
 - Zero ODP.
 - GWP Less Than 5.
- Fixing: Mechanical and Adhesive.
 - Insulation Adhesive: Wetherby Insulation Bedding Adhesive.
 - Fixing Type: TFIX-8M x 155mm (subject to pull out tests).
 - Fixing Retaining Plate: Wetherby 90mm Insulation Washer.
 - Fixings must achieve a minimum pull out of 0.7kN for low rise & 1.0kN for medium rise. Higher pull out test results may be required depending on the project type and location.

- Insulation to Reveals: Stone Wool Insulation Board.
 - Thickness: 30mm.
 - Fixing: ISO 45/65 x 95mm.
- Below DPC (Where Required).
 - Insulation Type: HD EPS Insulation Board.
 - Thickness: 80mm.
 - Fixing Type: TFIX-8M x 135mm.
 - Bedding Coat: Wetherby coat brush applied at 2mm to bottom of basetrack, substrate and bottom of insulation board.
 - Reinforcing Coat: WS Scrim Adhesive applied 6-8mm and reinforced with alkali resistant glass fibre reinforcing mesh.
 - Decorative Finish: TBC.
- Movement Joints: As Per Drawings.
 - Vertical Movement Joint Ref: Wetherby 81/81 PCGS Movement Joint.
 - Horizontal Movement Joint Ref: Wetherby back to back Stop Beads with Wetherby Silicone Sealant installed between to ensure long lasting durable seal.
 - Movement joints must be used to replicate any structural movement joints in the existing substrate as per site survey / Structural Engineers report.
 - Refer to clause 490 for more information
- Reinforcement: Wetherby Alkali Resistant Scrim Cloth incorporated into top third of the WS Scrim Adhesive.
 - Reinforcement Adhesive: WS Scrim Adhesive.
 - Secondary Fixing: Required at 1 per m².
 - Secondary Fixing Type: TFIX-8M x 155mm.
 - Stainless Steel Fixing Type: MBA-SS-08170 x 170mm (subject to pull out test).
 - Secondary mechanical fixings are required on all projects 2 storeys and above as per BRE Report BR135:2013.
 - NHBC require in all cases that a minimum of one non-combustible fixing is installed through the reinforcement mesh per insulation board, in addition to other fixings.
 - Secondary fixing requirements to be confirmed by local building control.
- Decorative Finish.
 - Wetherby Finish: Wetherby High Polymer Dash Receiver.
 - Colour: TBC.
 - Dash Aggregate: Wetherby Dry Dash Aggregate (3-8mm).
 - Colour: TBC.

- Beads / Trims / Accessories.
 - Full System Beads / Trims:
 - Wetherby Starter Track Ref: Wetherby 612N 120mm Powder Coated Galvanised Steel Bellcast Bead.
 - Wetherby Full Depth Stop Bead Ref: Wetherby 811N 110mm PCGS Full System Stop Profile.
 - Mechanical Fixing: Wetherby HIT 6/5 Hammerscrew Bead Fixing.

 - Roofline Closure System: TBC.
 - Specific detailing of Roofline Closure Systems (where applicable) to be confirmed in line with the Wetherby Roofline Closure System document.

 - Wetherby Cills: Type TBC.
 - Aluminium Overcill (if required)
Wetherby Aluminium Overcills. All cills shall be site measured (ensuring a minimum 40mm overhang) and supplied with welded end caps to suit the application.
 - Aluminium Undercill Extenders (if required)
Wetherby Aluminium Undercill Ref: 731/135 160mm Aluminium Undercill.
 - All cills and flashings must provide a minimum 40mm overhang to protect the Wetherby System.

 - Surface Render System Beads:
 - Wetherby Corner Bead Ref: Wetherby 18N Powder Coated Galvanised Steel Corner Bead.
 - Wetherby Render Bellcast Bead Ref: Wetherby 416N 16mm Powder Coated Galvanised Steel Bellcast Bead.
 - Wetherby Render Stop Bead Ref: Wetherby 81N 13mm Powder Coated Galvanised Steel Stop Bead.
 - Wetherby Movement Joint Ref: Wetherby 81/81 13mm Powder Coated Galvanised Steel Movement Joint
- Accessories:
 - Wetherby Sealing Tape: Pre-compressed, expanding waterproof sealing tape.
 - Wetherby Firtree Fixings.
 - Wetherby Jointing Pieces.
 - Wetherby End Caps.
 - Wetherby Approved Silicone Sealant.

310 DESIGN

- Complete the detailed design of system and associated features shown on drawings: Complete to meet requirements of this specification. Refer to Wetherby detail drawings.
- Please note all compliance needed to meet Building and Fire Regulations is the responsibility of the principle designer/ main contractor.
- Detailing of system junctions & ancillary items are to be agreed by all parties.

320 INTEGRITY

- Installation Requirements:
 - Weathertight under all anticipated conditions.
 - Capable of resisting all dead loads and design live loads, including impact and wind loads, and accommodating all thermal movements without damage.

330 IMPACT LOADING

- Impact Resistance of Finished Walls: Resistance to hard body impacts (3 joules to 10 joules) and to perforation.

340 WIND LOADING

- Design Wind Loads: The system shall be designed to withstand all design wind loads.

360 SAMPLES

- Procedure: Submit samples / examples of designated items for approval. Keep approved samples on site for the duration of the contract for inspection / comparison purposes.
- Designated items: Textured sample of Wetherby Spar Dash Finish.

370 UNIFORMITY OF COLOUR AND TEXTURE

- Type / proportion of constituent materials: Unchanged once samples of coatings have been approved.
- Supplies of materials: Sufficient to give consistent and uniform colour and texture.
- All materials shall be manufactured and supplied in accordance with BS EN ISO 9001: 2008.
- Wetherby renders and mortars are pre-blended during the manufacturing process by the supplier, although care should be taken to ensure colour uniformity between individual batches of material.

390 AVOIDANCE OF COLOUR SHADING

- To minimise the risk of variations in colour shade and to avoid dry line jointing, decorative finishes should be applied continuously without a break.
- Where breaks are unavoidable, they should be made where services or architectural features such as the lines of doors, windows, reveals or drainpipes help to conceal the position of the joint. Surface render beads can be used to provide a clean break in the render.
- Material sharing the same batch number should be used to complete an entire elevation where possible.
- Material with different batch numbers should be checked for colour consistency.

410B INSTALLATION

- Installer: The system shall be installed by a specialist contractor approved for the project by Wetherby Wall Systems.

415B EPSICON PAS2030:2023 SYSTEM APPLICATION**Base Bead**

Securely fix Wetherby bellcast bead above DPC level at base of the system. Mechanically fix bellcast bead at max. 300mm centres, 50mm from each end. Packing shims may be required to ensure the Bellcast bead is true to line and level. Any gaps behind the basetrack allowing free air movement behind the insulation should be sealed appropriately.

PCGS Full System Stop Bead

Securely fix Wetherby full system stop beads on Wetherby Sealing Tape to the extent of the system and its abutment to untreated areas i.e. meter boxes, rising service supplies or any other untreated abutment. Stop beads are to be fixed at max. 300mm centres, 50mm from each end. A continuous bead of Wetherby Approved Silicone Sealant must be applied to seal the stop bead to the substrate.

Roofline Closure System: Where Required

For guidance on application of the Roofline Closure Systems, please refer to our Roof Line Closure system guide. Project specific solutions must be agreed in line with Wetherby Detail Drawings and PAS 2030:2023 Guidance.

Where the existing roof does not provide an adequate overhang to the EWI system (minimum 40mm), a specialist roofing profile or flashing must be installed to provide adequate protection. All flashings must be correctly jointed and fixed, ensuring no weak points or potential areas for water ingress. Where required, temporary capping protection must be provided to protect the insulation from moisture until flashings / roof trims are in place. The EWI system must be sealed to the roofing profile using Wetherby Sealing Tape and Silicone Sealant.

Cills

Securely fix cills, ensuring they are secure and provide a water tight detail to protect the EWI system. Apply Wetherby sealing tape and Wetherby Approved Silicone Sealant as per Wetherby detail drawings.

Wetherby Insulation Bedding Adhesive – (Minimum 40%)

Wetherby Bedding Adhesive should be applied in a continuous line around the perimeter of the board with 3 additional dabs of adhesive distributed uniformly over the remaining surface. At least 40% of the board should be covered. The boards should be fully bedded into the adhesive and a mechanical fixing installed through the centre of each board to hold in place whilst the adhesive dries. Alternatively, apply Wetherby Insulation Bedding Adhesive to the entire face of the insulation boards using a 10mm minimum notched trowel ensuring a full spread of adhesive.

Application of Stone Wool Insulation Boards

Position and securely fix the Stone Wool insulation boards to the substrate. The boards should be tightly butt jointed, laid with staggered joints and overlapped at building corners. Board joints should not occur within 200mm of the corners of openings. Board pieces narrower than 200mm shall not be used. Where the insulation butts up against dissimilar materials, supply and install Wetherby Sealing Tape and ensure the boards are fitted tight against the seal, ensuring full compression of the tape.

N.B. thinner insulation may be required in passageways and to window reveals.

**Fixing Of Insulation Boards**

Fix boards mechanically to the substrate using approved Wetherby fixings in accordance with Wetherby fixing pattern (fixing pattern located at the back of this document subject to pull-out / wind load calculations). Fixings shall be installed so that the fixing head embeds 1-2mm in to the face of the insulation board surface. Additional fixings should be installed to ensure a maximum of 300mm centres at either side of building corners and around all openings.

Movement Bead / Slip Joints

Fix movement beads / slip joints at agreed locations using Wetherby approved fixings. Structural movement joints must be mirrored through the EWI system.

Surface Mounted Render Beads

Fix surface mounted render beads directly to the insulation board at required locations using Wetherby Firtree Fixings. A continuous bead of Wetherby Approved Silicone Sealant must be applied to seal the surface mounted render stop beads.

Existing Air Vents, Grilles etc.

Identify live or used air vents, grilles etc. and extend through the insulation system as work progresses.

Alkali Resistant Glassfibre Scrim Coat

Trowel apply a 4-6mm thick coat of scrim adhesive to the entire surface of the insulation boards. Lightly run a notched trowel through the scrim adhesive at a 45-degree angle to ensure the correct thickness of adhesive is applied. Bed Wetherby Alkali Resistant Scrim Cloth into top third of the wet adhesive, overlapping joints by 75mm minimum. The scrim cloth must be overlapped around building corners and returned into all reveals and heads. All beads must be fully scrimmed in. Install additional 250mm x 300mm minimum pieces of scrim cloth diagonally across corners of all wall openings. Install secondary fixings through the wet scrim adhesive and Wetherby Alkali Resistant Scrim Cloth whilst adhesive is wet. 100mm x 100mm scrim patches to be installed over each secondary fixing head. Finally scratch scrim adhesive horizontally in preparation for the Wetherby Dash Receiver finish coat.

**Angle Beads**

Fix onto scrim adhesive and with use of firtree fixings, PCGS angle beads to all external building corners, window / door jambs and heads.

Silicone Sealant

Gun apply a continuous bead of Wetherby Approved Silicone Sealant at points where the basecoat will butt up against other materials, e.g. window frames, door frames, eaves, fascia's, projecting wall vents, gas and electric meter boxes etc. ensuring water tightness. Silicone Sealant to be installed after the dash has completely cured to provide double seal as per PAS2030:2023 detailed drawings.

FID Fixings

Install FID fixings through insulation to install lightweight fixtures to the Insulation and Scrim Adhesive.

SWI-FIX / Approved Fixings

Install SWI-FIX washer and suitable fixing to be used to fix back items such as RWP's, lights, handrails etc.

Below DPC System Installation

Please refer to the Wetherbycoat below DPC application guide and Wetherby Detail Drawings.

Wetherby Polymer Cement Dashing Mortar

Trowel apply one coat of Wetherby Polymer Cement Dashing Mortar in the traditional manner, at a thickness of 8-10mm. A darby or straight edged tool may be used to ensure a relatively uniform thickness, which can be smoothed out using a plastic float. Complete individual surfaces in one operation where practical.

Wetherby Mineral Aggregate Spar Dash

Whilst the freshly applied Dashing Mortar is still wet, dry dash the render surface in an upwards motion using clean Wetherby dashing grade mineral aggregates. Ensure consistent application of the aggregate to leave an aesthetically pleasing finish.

**Cleaning**

Wipe clean all exposed PVC nosing, cills etc., at each work stage whilst render is still wet.

Application Videos

Wetherby have detailed application videos available online, please see <http://www.wall-systems.co.uk/videos/>.

420 ADVERSE WEATHER

- Materials / Surfaces: Do not use frozen materials and do not apply materials to frost bound substrates.
- Adhesives / Mortars / Renders: Do not apply when air temperature is at or below 5°C. Render products may be applied where temperatures are above 3°C on a rising thermometer and are forecast to stay above 5°C for an extended period on the same day.
- Adhesives / Mortars / Renders: Do not apply when relative humidity is equal to or greater than 90%.
- Do not apply materials when the air temperature or wall surface is in excess of 30°C without protection of the surface.
- Temperature of the work: Maintained above minimum level recommended by manufacturer until adhesive / mortar / render has fully hardened.
- Drying Times: Drying times of decorative finishes, particularly pre-mixed water based materials, may be greatly extended during periods of low temperature and / or high relative humidity 90% and above.
- Newly rendered surfaces: Protect newly rendered surfaces against rain, snow or other precipitation. Ensure that material is protected from frost, wash-offs etc.
- Application of renders, mortars or decorative finishes shall not be carried out on elevations where summer strength sunlight is hitting the area square on for prolonged periods without affording protection.
- Coatings damaged by rain or frost: Remove and replace.

440 ON SITE PULL OUT TESTS ON FIXING PINS

- Objective: To prove suitability of structural substrate and determine size and number of fixings required.

450 WINDOW CILL / FLASHING PROJECTION

- Where window frames incorporating window sills or cappings/flashings are to be supplied by others, the cill/flushing projection must extend a minimum of 40mm when measured from the drip/throat to the face of the finished Wetherby system. In severe/very severe exposure zones, consider increasing the projection to 50mm. Refer to Wetherby Technical Services for further guidance.

490 CONSTRUCTION / MOVEMENT JOINTS / SLIP JOINTS

- Location: As shown on drawings.
- Formation: Accurately to detail.
- Modifications to joint locations / design: Agree revisions before proceeding.
- All structural movement joints must be mirrored through the EWI system.
- Where the system is to be continued over joints between dissimilar substrates which are in the same plane, a movement joint should be incorporated to allow for differential movement.

500 FLUES, CHIMNEYS AND COMBUSTION AIR VENTILATORS

- The combustion air supply must be isolated and air ventilator continuously sleeved through the wall.
- Under PAS 2030:2023, both installer and Retrofit Designer have strict responsibilities placed upon them when it comes to the identification and safeguarding of essential ventilation requirements. Please refer to the PAS2030:2023 Fuel Burning Appliances Document for further information.

With regards to gas flues there are two methods of installation, either a clear gap is left around the flue (300mm for fanned draught flues / 600mm for natural draught flues) or a 200mm non-combustible insulation slab installed around an extended flue. While Wetherby include both alternatives in the detail drawings, main contractors and installers must ensure the chosen method is approved in conjunction with the boiler manufacturer's specification.

515 LIGHTNING CONDUCTOR

- Should be relocated to the surface of the system or fix Stone Wool insulation strip around the lightning conductor. Notch the back of the insulation board to allow for movement of lightning conductor leaving a 10mm gap as per Wetherby detail drawing.

520 SUPPORTS FOR SERVICES / FITTINGS

- Supports for soil and rainwater pipes, signs, CCTV cameras etc: Provide in locations shown on the drawings.
- Sleeved fixings shall be installed into the load-bearing background after completion of the render works in accordance with Wetherby recommendations.
- No load is to be transferred to the insulated render system.

528 EXTERNAL POWER CABLES

- External power cables must not be covered over by the EWI system or cover plates in any circumstances. Power cables must be relocated, left open and visible or suitably & safely enclosed with guidance from the power distribution authority.

530 SEALANT JOINTS

- Sealant: Wetherby Approved Silicone Sealant.
- Joints: Formed in accordance with section Z22 and system manufacturer's recommendations using any necessary joint fillers, backing strips etc.
- Sealant should be regularly checked and replaced as required. Sealant is not covered as part of the Wetherby system warranty.

540 STORAGE OF MATERIALS

- Adequate dry weatherproof and ventilated storage shall be provided for materials.
- All materials shall be protected against frost.
- Insulation boards must be kept dry at all times.
- Cementitious products shall be stored off the floor.
- Renders to be stored in temperatures of at least 5°C.
- Materials should be protected from prolonged exposure to sunlight.

550 INSPECTION OF COMPLETED INSTALLATION

- Timing: As soon as possible after completion of the work and before removing scaffolding.
- Notice for inspection (minimum): 7 working days.
- Defects: Report immediately.

570 MATERIALS AND SITE CONDITIONS

- All materials shall be provided for the proper and efficient execution and completion of the works.
- Materials shall be mixed, applied and fixed in accordance with the relevant clauses of the specification and the manufacturer's instructions.
- A clean, fresh supply of water shall be provided for the works, via the management contractor.
- Suitable scaffolding that has a minimum gap of 300mm (all scaffold items) from the elevation surface in order to facilitate application requirements, shall be provided, erected, maintained and later removed for the proper and efficient execution and completion of the works.
- All necessary temporary supports for drains, water pipes, gas pipes, electrical cables and telephone cables shall be provided and maintained until the permanent supports are reinstated.
- Temporary flexible tubing shall be provided for the efficient discharge of rainwater from the buildings to protect the system during the progress of the works.

580 CLEANLINESS OF WORKS

- Protect all existing works, approaches and adjacent surfaces including windows and doors etc. using suitable sheeting, boards, covers etc.
- Remove all splashes, droppings etc. from completed works immediately and before drying takes place.


590 CONTROL OF POLLUTION

- All debris and rubbish arising from the works shall be removed off site from time to time to keep the site and works clean and tidy. All measures shall be taken to control the noise levels produced by the operatives on site to comply with the Control of Pollution Act. Precautions should be taken to prevent pollution of any river watercourse, reservoir, drainage or the like by the operatives on site.

600 MAINTENANCE

- An initial inspection should be made within 12 months and regularly thereafter to include:
 - visual inspection of the render for signs of damage. Cracks in the render exceeding 0.2 mm must be repaired. Impact damage must be repaired to prevent moisture ingress into the system.
 - visual inspection of architectural details designed to shed water to confirm that they are performing properly.
 - visual inspection to ensure that water is not leaking from external downpipes or gutters, as such leakage could stain or penetrate the rendering.
 - Sealant joints at window and door frames, etc which must be replaced as required. Sealant is not covered as part of the Wetherby warranty.
- Maintenance schedules must be created and maintained for the building, which should include any repairs undertaken and the replacement and resealing of joints (for example, between the insulation system and window and door frame).
- The render may become discoloured with time, the rate depending on the initial colour, the degree of exposure and atmospheric pollution, as well as the design and detailing of the wall. In common with traditional renders, discoloration by algae and lichens may occur in wet areas and can be removed simply with a biocidal wash.
- Damaged areas must be repaired using the appropriate components and procedures detailed in the Certificate holder's installation instructions and in accordance with BS EN 13914-1: 2005. Please see Wetherby O&M Manual and Wetherby Maintenance Information for further details.

Wetherby EWI Fixing Pattern - (Subject to Pull Out Tests & Wind-Load Calculations)

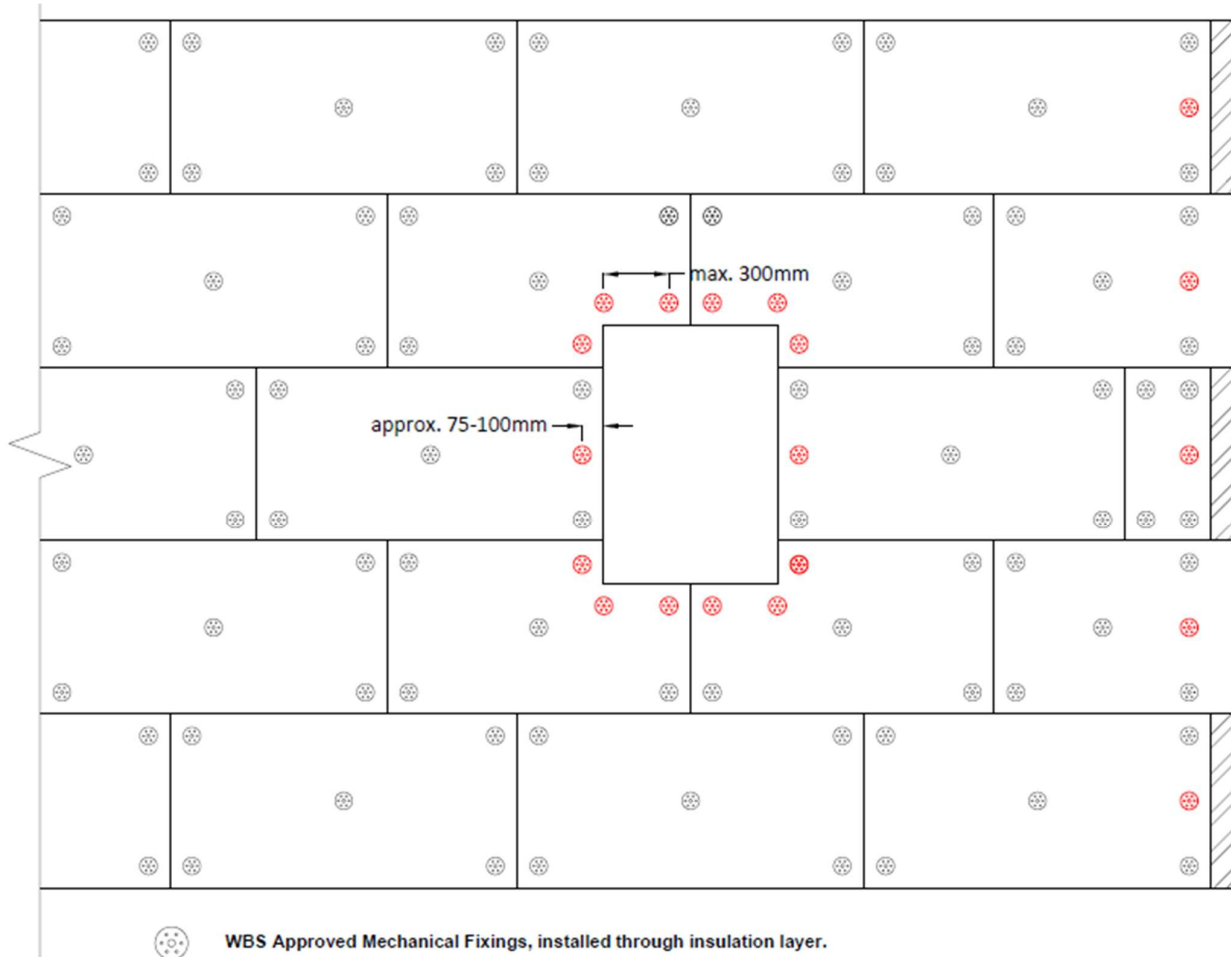

Additional WBS Approved Mechanical Fixings, installed at max. 300mm centres around all openings and external corners.